


製品図

日本プラスチック工業株式会社

品名	排水用硬質ポリ塩化ビニル管継手 (90° Y)
	DV-DT シルバークレー
	(JIS K 6739 規格品)

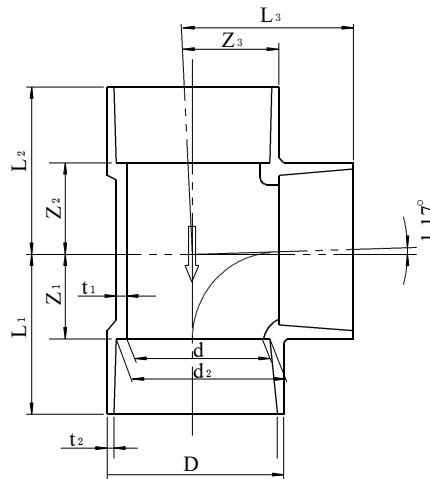

単位:mm

呼び径	d1	d2	ℓ	d	t1	t2	D	Z1	Z2	Z3	L1	L2	L3	
					(最小)			±2						
50×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	—	2.5	54	27	27	33	52	52	55
	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67						
65×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	—	2.5	54	27	28	42	62	63	64
	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83						
65×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	34	35	42	69	70	67
	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83						
75×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	—	2.5	54	27	28	48	67	68	70
	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97						
75×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	34	35	48	74	75	73
	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97						
75×65	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83	42	43	48	82	83	83
	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97						
100×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	34	35	62	84	85	87
	100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124						
100×65	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83	42	43	62	92	93	97
	100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124						
100×75	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97	48	49	62	98	99	102
	100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124						
★ 125×75	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97	49	51	75	114	116	115
	125	140.70±0.40	139.40±0.40	65±2	125.0±1.2	5.4	4.7	151						
★ 125×100	100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124	62	64	75	127	129	125
	125	140.70±0.40	139.40±0.40	65±2	125.0±1.2	5.4	4.7	151						
● 150×75	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97	51	53	88	131	133	128
	150	165.85±0.45	164.25±0.45	80±2	145.8±1.3	6.3	5.6	178						
● 150×100	100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124	62	65	88	142	145	138
	150	165.85±0.45	164.25±0.45	80±2	145.8±1.3	6.3	5.6	178						

備考 ★印は塩化ビニル管・継手協会規格品 (AS-64)、●印はメーカー規格品です。
許容差を明記していない寸法は、参考寸法です。