


製品図

日本プラスチック工業株式会社

品名	水道用硬質ポリ塩化ビニル管継手（バルブ用ソケット）
	T S - V S
	（ J I S K 6 7 4 3 規格品）

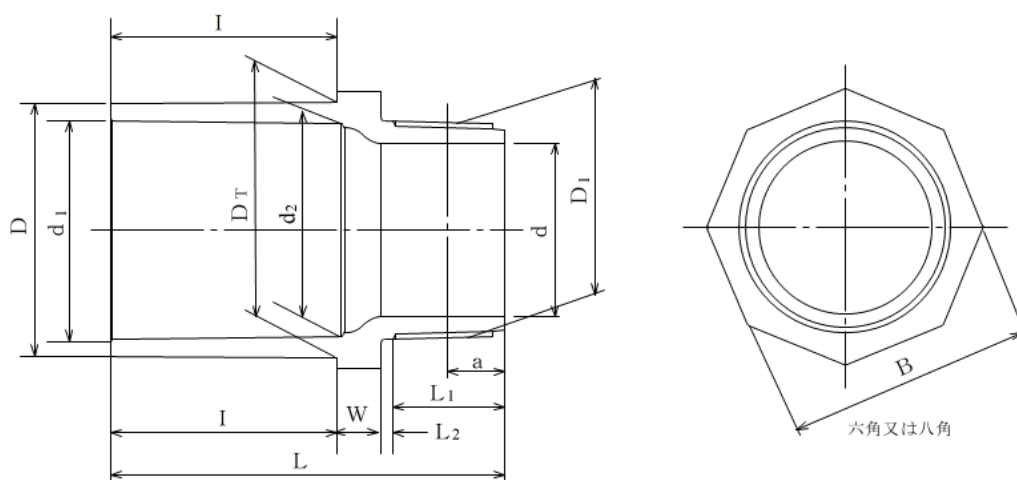

単位：mm

呼び径	D , D _T	d	d ₁	d ₂ (最小)	1 / T	⁺⁴ I _{-0.5}	⁺⁵ L ₋₂	L ₂ (最大)	W	B
13	24.0 (-0.6)	13	18.40 ± 0.20	13	1/30	26.0	50	4	6	24
16	29.0 (-0.7)	13	22.40 ± 0.20	16	1/34	30.5	54	4	6	29
20	33.0 (-0.8)	18	26.45 ± 0.20	20	1/34	35.0	64	5	8	33
25	40.0 (-1.0)	23	32.55 ± 0.25	25	1/34	40.0	71	5	8	40
30	46.0 (-1.0)	31	38.60 ± 0.25	31	1/34	44.5	80	5	10	46
40	57.0 (-1.2)	37	48.70 ± 0.30	40	1/37	55.5	92	5	10	57
50	70.0 (-1.5)	48	60.80 ± 0.30	51	1/37	51.0	106	5	12	70

呼び径	ねじ部 (JIS B 0203のテーパおねじに準ずる)				
	呼 び	D ₁	ねじ山数	a	L ₁ (最小)
13	R 1/2	20.955	14	8.16 (±1.81)	13.16
16	R 1/2	20.955	14	8.16 (±1.81)	13.16
20	R 3/4	26.441	14	9.53 (±1.81)	14.53
25	R1	33.249	11	10.39 (±2.31)	16.79
30	R1 1/4	41.910	11	12.70 (±2.31)	19.10
40	R1 1/2	47.803	11	12.70 (±2.31)	19.10
50	R2	59.614	11	15.88 (±2.31)	23.38