


製 品 図

日本プラスチック工業株式会社

| | |
|-----|--|
| 品 名 | 排水用硬質ポリ塩化ビニル管継手（径違い90° Y） DV-DT （JIS K 6739 規格品） |
|-----|--|

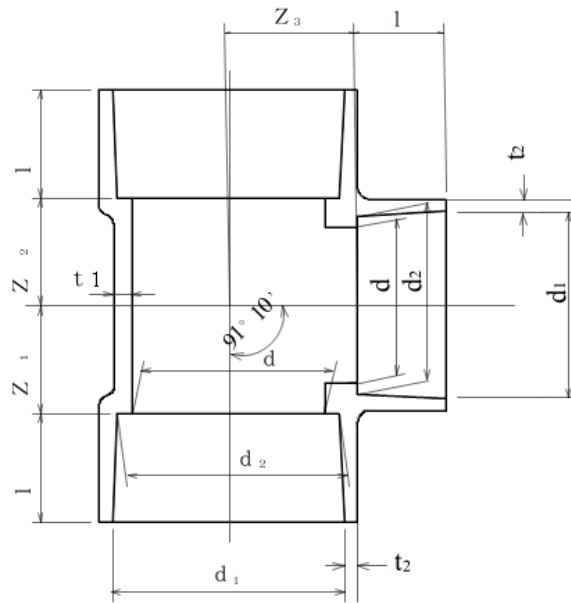

単位：mm

| 呼び径 | | d_1 | d_2 | I | d | t_1 (最小) | t_2 (最小) | Z_1 (±2) | Z_2 (±2) | Z_3 (±2) |
|-------|----|------------|------------|------|----------|---------------|---------------|---------------|---------------|---------------|
| 50×40 | 50 | 60.35±0.30 | 59.75±0.30 | 25±1 | 51.0±0.9 | 3.1 | 3.0 | 27 | 27 | 33 |
| | 40 | 48.30±0.30 | 47.80±0.30 | 22±1 | 40.0±0.9 | | 2.5 | | | |
| 65×40 | 65 | 76.40±0.30 | 75.70±0.30 | 35±1 | 67.0±0.9 | 3.1 | 3.0 | 27 | 28 | 42 |
| | 40 | 48.30±0.30 | 47.80±0.30 | 22±1 | 40.0±0.9 | | 2.5 | | | |
| 65×50 | 65 | 76.40±0.30 | 75.70±0.30 | 35±1 | 67.0±0.9 | 3.1 | 3.0 | 34 | 35 | 42 |
| | 50 | 60.35±0.30 | 59.75±0.30 | 25±1 | 51.0±0.9 | | 3.0 | | | |
| 75×40 | 75 | 89.45±0.30 | 88.65±0.30 | 40±2 | 77.2±0.9 | 3.6 | 3.4 | 27 | 28 | 48 |
| | 40 | 48.30±0.30 | 47.80±0.30 | 22±1 | 40.0±0.9 | | 2.5 | | | |
| 75×50 | 75 | 89.45±0.30 | 88.65±0.30 | 40±2 | 77.2±0.9 | 3.6 | 3.4 | 34 | 35 | 48 |
| | 50 | 60.35±0.30 | 59.75±0.30 | 25±1 | 51.0±0.9 | | 3.0 | | | |
| 75×65 | 75 | 89.45±0.30 | 88.65±0.30 | 40±2 | 77.2±0.9 | 3.6 | 3.4 | 42 | 43 | 48 |
| | 65 | 76.40±0.30 | 75.70±0.30 | 35±1 | 67.0±0.9 | | 3.0 | | | |